

# GSS 660

## Compact Powerhouse™

- Low-Power High-Performance Intel® Celeron® J1900 Quad-Core Processor
  - Sleek and Compact Body with Small Footprint
    - Bezel-Free True-Flat PCAP Touch
- 15" Display with LED Backlight Delivering Bright and Crisp Images
  - Multiple I/O Interfaces for Peripherals
  - Flexible Installation on a Counter or a Wall
    - Faster Installation and Serviceability
  - Modern and Contemporary Styling for Interior Décor
- Engineered and Optimized for Hospitality and Retail Businesses



## Features & Benefits



### New Look. New Design

- Sleek and Compact. Small Footprint
- Modern and Contemporary Styling



### Powerful Performer

- Intel® Celeron® J1900 Quad-Core Processor
- Low-Power High-Performance. Fanless Operation



### Superior Touch Display

- Bezel-Free True-Flat 15" LED LCD Display
- PCAP Touch Activated with Fingers and Gloves



### Install It Anywhere

- On a Counter or a Wall
- VESA Compatible (Option)



### Save Time and Cost

- Easy Access to I/O Interfaces
- Faster Installation and Serviceability



### Connect It to All

- Multiple I/O Interfaces
- 6 USB, 5 Serial. Optional Expansion Available

# Specifications

General Specifications		Model : J19
<b>System</b>		
CPU	Intel® Celeron® J1900 (2.0 GHz) Quad-Core Processor / Fanless	
Chipset	ITE IT8786-I	
Storage	SATA 2 (3Gb/s) 2.5 inch SSD 64GB, Support AHCI	
Memory	4GB Standard (Max. 8GB) Type: DDR3L 1333 MT/s / Socket 1 x SODIMM	
Graphics Controller	Integrated Intel HD Graphics	
Audio	Realtek ALC662-VD 5.1 CH Audio	
<b>LCD Display</b>		
Size / Type	15" TFT LED Backlight	
Resolution	1024 x 768	
Luminance	300 cd/m <sup>2</sup> (typ.)	
<b>Touch Screen</b>		
Type	Projective Capacitive Touch	
Controller Interface	USB Interface	
<b>I/O Interface</b>		
Display Port	1 x VGA (With 12V power output)	
USB Port	6 (Rear 2, Back 4 / USB 2.0 x 6 Ports), USB A type 1 (Rear 1, Reserved for MSR/SCR/I-Button), RJ-45 (COM 1 with 5V/12V power output on 9pins)	
Serial Port	5 (COM2~3 RJ-45 , Full Signal) (COM4 RJ-11, Only TX/RX, 12V power output, Reserved for CDP) (COM6 RJ-45, Only TX/RX, 5V power output, Reserved for MSR)	
Ethernet Port	RJ-45	
Audio	Line-out	
Power DC-IN	1 (4pins connector)	
<b>Power Requirement</b>		
Adapter Input	Adaptor 12V, 5A	

<b>OS Support</b>	
OS	Windows 7, Windows 8.1, POS Ready 7, Windows 10
<b>Mechanical &amp; Environmental</b>	
Operating Temperature	0°C ~ 60°C at 10% ~ 90% humidity
Storage Temperature	-20°C ~ 80°C at 10% ~ 90% humidity
Color	Dark Grey, White
Dimensions (W x H x D)	364 x 333 x 210 (mm)
Net Weight	5,300g
Packing Dimension (W x H x D)	500 x 470 x 300 (mm)
Packing Weight	8,000g
Certification	CE, FCC, KC, CB, CCC

Optional Configuration	
Storage	2.5 inch SSD 128GB 2.5 inch HDD 500GB 2.5 inch HDD 1TB
I/O Expansion	1 x COM5 (RJ-45 8pins) (Factory Option) 1 x Cash Drawer Port (RJ-11 6pins) (Factory Option)
Customer Display (CDP)	VFD (20 columns x 2 lines) 9.7" 2nd LCD (1024 x 768 resolution) 12.1" 2nd LCD (1024 x 768 Resolution) 15" 2nd LCD (1024 x 768 Resolution)
2nd Display	
Magnetic Stripe Reader	MSR : Comply with ISO 7811, Support 1 & 2 & 3 track
Smart Card Reader	SCR : EMV level 1, 2
Dallas	Dallas I-button Reader
Camera	5M USB Interface (Internal) (Factory Option)
Wall Mount Kit	VESA-Compatible (75 x 75mm , 100 x 100mm)
Serial Conversion Cable	RJ-45 to D-sub 9

\*Other mounting options available upon request. \*Specifications may change without prior notice.

## Peripheral Options



**Customer Display**  
• VFD (2 Lines x 20 Characters)



**2nd Display**  
• 9.7", 12.1", 15" LCD




**Multi-Reader**  
• MSR, SCR



**POS Printers**  
• A7, A11

## Dimension View

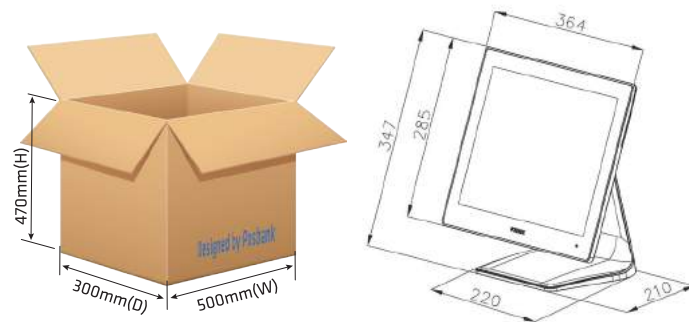

## Contact Us



### GSS Technology

3 Sutton Ave  
Oxford, MA 01540  
Tel: 508.731.5979

Email: sales@gssstechnology.com

Web: www.gssstechnology.com